




Installation Guide for Bi-Xenon HID Conversion Kit

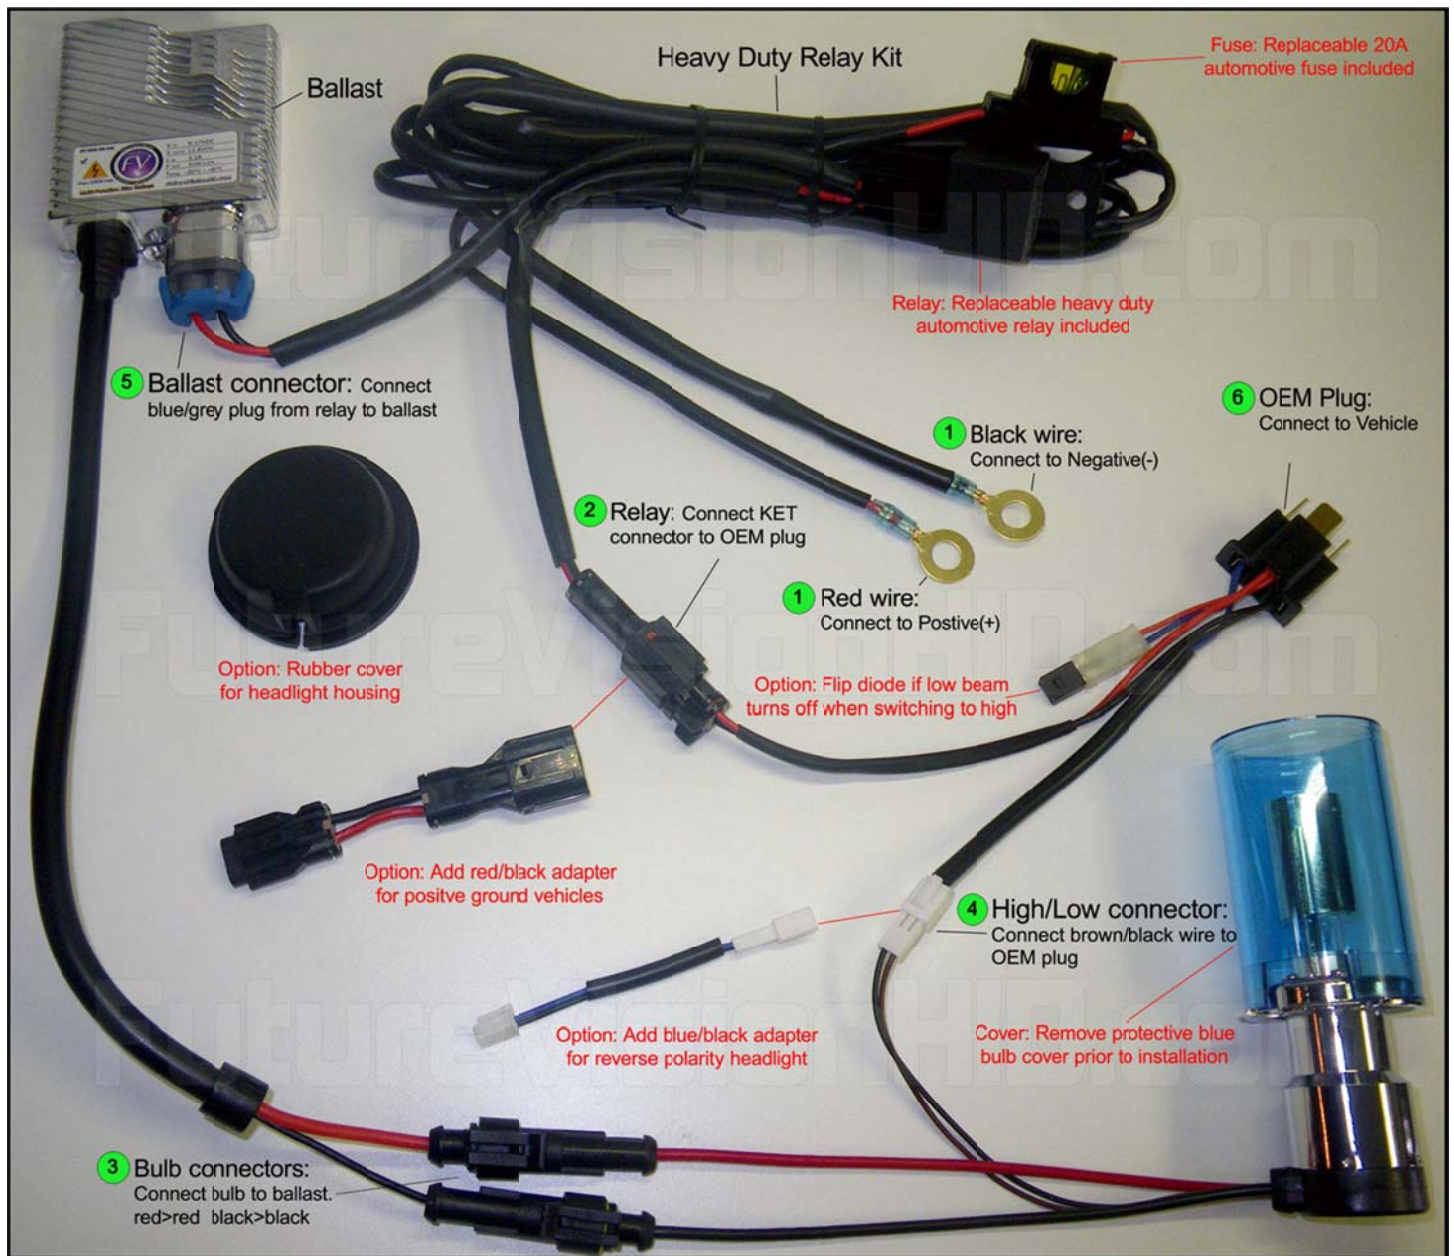

HOW TO CONNECT BI-XENON BULB TO VEHICLE

1. Connect relay kit directly to battery. Red positive(+), Black negative(-)
2. Connect black KET connector on relay to OEM plug
3. Connect both bulb connectors to ballast,
4. Connect bi-xenon(H/L) control wire from bulb to OEM plug
5. Connect grey/blue plug from the relay kit to ballast
6. Connect OEM plug directly to the original vehicle bulb plug in